




MR 500 SOFTLINE

Abrasive on foam backing for a soft sanding.

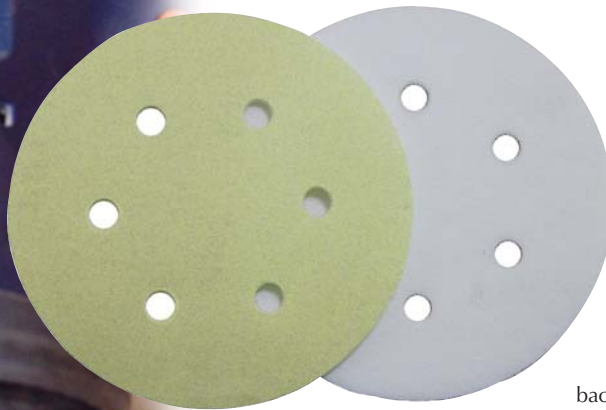

USE : Especially designed for paint, wood and metal sanding.

Applications examples for paint touch up:

- Mastic sanding (grits P180 and P220)
- Primer sanding (grit P240 to P600)
- Varnish sanding (grit P800)

TECHNICAL DATA : The SOFTLINE range is made of polyurethane foam composed of an open cellular structure, with 4mm velour backing on a latex paper backing. Aluminium oxide grit, resin.

Very fast fixation on the pad. Flexible product adapted to all shapes.




ADVANTAGES

- ✓ **EXCELLENT SURFACE ASPECT** (roughness).
- ✓ **THE SOFT BACKING ALLOWS AN EFFICIENT SANDING OF EVERY PARTS SHAPE.**
- ✓ **SANDING THE CORNERS WITHOUT DRILLING THEM.**
- ✓ **REDUCE THE MACHINE'S VIBRATIONS** in the user's hand.


Grit	Selling Unit	Diam. 150 mm 6 holes	
		Code	Lead time
180	20	8745	OR
220	20	8746	ST
240	20	8747	ST
280	20	8748	OR
320	20	8749	ST
360	20	8750	OR
400	20	8751	OR
500	20	8752	OR
600	20	8753	OR
800	20	8754	OR

THE MAIN HOLING STANDARDS



Disc 150 mm
6 holes


Atlas copco : ROS 150E, ROS150E/M
Bosch : PEX 420AE, GEX 150AC, GEX 150ACE, PEX 15AE, PEX 150ACE, GX 150CE, GEX 150AC
Metabo : SXE 425XL, SXE 450DUO, SXE 450
Stayer : RO 150 **Elu :** ES 56E
Kress : 900 HEX/2, 900 MPS
Hitachi : SAY 150E
Dewalt : DW 443
Felisatti : TP 421/AS, TP 523 ASCE
Peugeot : TX 4408D, PRX 150E
Hilti : WFE 150
Ibrex pro tool : ESP 150E



Disc 125 mm
8 holes


Bosch : PEX 125A/1, GEX 125AC, GEX 125A, PEX 125AE, PEX 12AE, PEX 12A-1, PEX 12AE-1, PEX 125A, PEX 12, PEX 125E
Ryobi : RS 125
Sparky : EX 125, EX 125E
Metabo : SXE 425, SXE 125
Makita : BO 5010, BO 50000
Kress : CPS 6125E set, DES 6625E, 125 CSP, CSP 6125-1, CPS 61256-1, HEX 6385E, HEX 1385E
Elu : ES 55E
Fein : MSF 636-1
Dewalt : DW 423

Hitachi : TSV 13Y
Skil : 7400, 7425, 7435 H, 7500, 7430 H, 7430, 7435, 74-25 H
Peugeot : TX 4303
Aeg : TXE 150, EXE 400, EX 400, EX 450, EXE 450, EX 460
Festo : ES 125, ES 125-Plus
B&d : BD 190E, BD 190S, BD 190, KA 190, KA 190E, KA 190S, KA 220




Disc 150 mm
8 holes + 1 (ext.)

Festo : RO1, RO1E, RO2E, WET2E, RO2



Disc 150 mm
8 holes

Fein : MSF 631-1
Rupes : BR3, BR3E



Disc 115 mm
8 holes

Bosch : PEX115A - PEX115AE - 9,6VA PEX115 - PEX11A PEX11AE
Kress : CSP6115E CSP6115/1
Peugeot : PO115AE - PAE115
Ryobi : RS115
Skil : 7/15H - 7415
Einhell : EX115

For self-adhesive discs, contact us

PR777 REDOXAL WITH A VELCRO BACKING

Ideal for works needing an important material removal.

USE : High resistance due to its heavy paper backing and its double resin coat.

The PR777 is mainly used to sand hard materials (steel, hard woods,...). Also efficient on composite materials. Ideal for an important material removal..

TECHNICAL DATA : E-paper backing (220 g). Aluminium oxide. Very hard resin. Velcro fixation (for self-adhesive, contact us).

ADVANTAGES

- ✓ A heavy paper backing for **A GOOD RESISTANCE**.
- ✓ A double resin coat for **A BETTER GRITS HOLDING**.
- ✓ High performing grits for **HIGH CUTTING POWER**.

Grit	Selling Unit	Diam. 203 mm without hole		Selling Unit	Diam. 150 mm								Selling Unit	Diam. 125 mm 8 holes		Diam. 125 mm 8 + 1 holes	
		Code	Lead time		without hole	6 holes	8 holes	8+1 holes	Code	Lead time	Code	Lead time		Code	Lead time	Code	Lead time
40	50	7340	OR	50	3619	ST	3777	ST	1401	OR	4029	ST	50	3800	ST	7300	ST
60	50	7341	OR	100	3618	ST	3776	ST	1321	OR	698	ST	100	3799	ST	7301	ST
80	50	7342	ST	100	3617	ST	3775	ST	812	OR	435	ST	100	3798	ST	7302	ST
100	50	7343	OR	100	3616	OR	3774	ST	1311	OR	4030	ST	100	3797	OR	7303	OR
120	50	7344	OR	100	3615	ST	3773	ST	813	OR	626	ST	100	3796	ST	7304	ST
150	50	7345	ST	100	3614	OR	3772	ST	1029	OR	699	ST	100	3795	OR	7305	OR
180	50	7346	OR	100	3620	OR	3771	OR	1402	OR	778	OR	100	3794	OR	7306	OR
220	50	7347	OR	100	713	OR	3770	ST	806	OR	4028	ST	100	3801	OR	7307	OR
240	50	7348	ST	100	774	OR	2054	OR	807	OR	779	OR	100	3810	OR	7308	OR

NEW : PACKING OF 10 DISCS (minimum of order of 100 discs per reference).

Grit	Selling unit	Diam. 150 mm								Diam. 125 mm 8 holes		Diam. 125 mm 8 + 1 holes	
		without holes	6 holes	8+1 holes	Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time	
40	10	6950	OR	6930	OR	6940	ST	6960	ST	7520	ST		
60	10	6951	OR	6931	ST	6941	ST	6961	ST	7521	ST		
80	10	6952	OR	6932	ST	6942	ST	6962	ST	7522	ST		
120	10	6954	OR	6934	ST	6944	ST	6964	ST	7523	ST		
150	10	6955	OR	6935	OR	6945	ST	6965	ST	7524	OR		
180	10	6956	OR	6936	OR	6946	OR	6966	OR	7525	OR		

ACCESSORIES (pages 48 and 49)

The velcro discs are adapted to velcro pads but also to "mouse" sanding block or hand pad. These products allow the user to finish with a manual work what has been started with a machine using the same product.



Mouse blocks



Hand pad

PADS

See our sanding pad range on page 49.



VELCRO/ SELF ADHESIVE CONVERTER

To adapt a velcro disc on a self-adhesive pad.

FOAM INTERFACE

To increase the flexibility and to soften the sanding work.



Polyvalent disc adapted to all materials.



LR 590 AUTOCLEAN
The most polyvalent product.

VELCRO DISCS – DIAM.150MM

Grit	Selling unit	Diamètre 150 mm									
		Without hole		6 holes		8 holes		8-1 holes		Discs with holes	
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time
40	50	993	ST	1003	ST	1013	OR	1024	ST	6982	OR
60	100	992	ST	1002	ST	1012	OR	1023	ST	6983	OR
80	100	991	ST	1001	ST	1011	OR	1022	ST	6984	OR
100	100	990	ST	1000	ST	1010	OR	1021	ST	6985	OR
120	100	989	ST	999	ST	1009	OR	1019	ST	6986	OR
150	100	988	ST	998	ST	1008	OR	1018	ST	6987	OR
180	100	987	ST	997	ST	1007	OR	1017	ST		
220	100	1138	ST	1211	ST	1290	OR	1294	ST		
240	100	986	ST	996	ST	1006	OR	1016	ST		
320	100	985	ST	995	ST	1005	OR	1015	ST		
400	100	984	ST	994	ST	1004	OR	1014	ST		

USE : The LR590 guaranties a high finishing level with its finer grits and an important cutting power with its coarser grits.

Efficient in the car, wood and building industry.

TECHNICAL DATA : Latex paper backing, semi-friable aluminium oxide, resin. Anti-clogging treatment.


VELCRO DISCS – OTHER SIZES

Grit	Selling unit	Diam. 115 mm 8 holes		Diam. 125 mm 5 holes		Diam. 125 mm 8 holes		Diam. 125 mm 8 + 1 holes		Selling unit	Diam. 203 mm 8 holes	
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time		Code	Lead time
40	50	4126	OR	7078	OR	4106	OR	7310	OR	50	7240	OR
60	100	4122	OR	7079	OR	4105	OR	7311	OR	50	7241	OR
80	100	4123	OR	7080	OR	4104	OR	7312	OR	50	7242	OR
100	100	4125	OR	7081	OR	4101	OR	7313	OR	50	7243	OR
120	100	4121	OR	7082	OR	4103	OR	7314	OR	50	7244	ST
150	100	4119	OR	7083	OR	4110	ST	7315	OR	50	7245	OR
180	100	4124	OR			4102	OR	7316	OR			
220	100	4127	OR			4107	ST	7317	OR			
240	100	4120	OR			4100	OR	7318	OR			
320	100	4129	OR			3802	OR	7319	OR			
400	100	4118	OR			3803	ST	7320	OR			



NEW : PACKING OF 10 DISCS (minimum of order of 100 discs per reference)

Grit	Selling unit	Diam. 150 mm						Diam. 125 mm 8 holes		Diam. 125 mm 8+1 holes	
		without holes		6 holes		8+1 holes					
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time
40	10	7085	OR	7093	OR	7070	ST	7102	OR	7530	OR
60	10	7086	OR	7094	OR	7071	ST	7103	OR	7531	OR
80	10	7087	OR	7095	OR	7072	ST	7104	OR	7532	OR
120	10	7088	OR	7096	OR	7073	ST	7105	OR	7533	OR
180	10	7089	OR	7097	OR	7074	OR	7106	OR	7534	OR
240	10	7090	OR	7098	OR	7075	OR	7107	OR	7535	OR
320	10	7091	OR	7099	OR	7077	OR	7108	OR	7536	OR
400	10	7092	OR	7100	OR	7076	OR	7109	OR	7537	OR

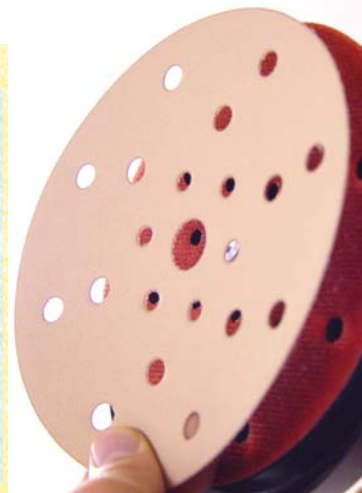

ADVANTAGES

- ✓ **POLYVALENT PRODUCT** adapted to all materials.
- ✓ An anti-clogging layer for **A BETTER LIFETIME.**

LR590 AUTOCLEAN – SELF ADHESIVE (minimum of 12000 discs/grit)


Grit	Selling unit	Diam. 150 mm							
		without holes		6 holes		8 holes		8+1 holes	
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time
40	50	953	OR	963	OR	973	OR	983	OR
60	100	952	OR	962	OR	972	OR	982	OR
80	100	951	OR	961	OR	971	OR	981	OR
100	100	950	OR	960	OR	970	OR	980	OR
120	100	949	OR	959	OR	969	OR	979	OR
150	100	948	OR	958	OR	968	OR	978	OR

The high performance solution, with an anti-clogging layer for car, wood, composite industries and other finishing works.

LR 880 PRIMIUUM

USE : The LR880 is particularly adapted for high finishing level works. Efficient to soften mastics, to sand sealers, to finish matt before lacquer coat. Excellent results on wood and composite materials.

TECHNICAL DATA : Latex paper C, treated aluminium oxide, high performance resin and anti-clogging treatment.

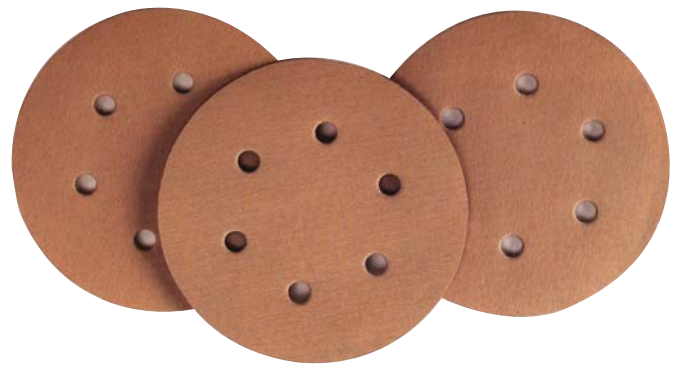

VELCRO DISCS – DIAM.150MM

Grit	Selling unit	Diameter 150 mm									
		without holes		6 holes		8 holes		8 + 1 holes		21 holes	
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time
80	100	7700	OR	7718	ST			7730	ST	7130	OR
100	100	7715	ST	7717	ST			7747	ST	7131	OR
120	100	7714	ST	7719	ST			7716	ST	7132	OR
150	100	7701	ST	7720	ST	7153	OR	7733	ST	7133	OR
180	100	7702	ST	7721	ST	7154	OR	7734	ST	7134	OR
220	100	7703	ST	7722	ST	7155	OR	7735	ST	7135	OR
240	100	7704	OR	7723	ST	7156	OR	7736	OR	7136	OR
280	100	7705	OR	7724	ST			7737	OR	7137	OR
320	100	7706	OR	7725	ST	7157	OR	7738	ST	7138	OR
360	100	7707	OR	7726	ST			7739	OR	7139	OR
400	100	7708	ST	7727	ST	7158	OR	7740	ST	7140	OR
500	100	7709	OR	7728	ST			7741	OR	7141	OR
600	100	7710	OR	7729	ST			7742	OR	7142	OR

VELCRO DISCS – OTHER SIZES

Grit	Selling unit	Diam. 76 mm 3 holes		Diam. 115 mm 8 holes		Diam. 125 mm 5 holes		Diam. 125 mm 8 holes		Selling unit	Diam. 203 mm 8 holes	
		*Plastic shrink packs										
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time		Code	Lead time
150	100	7190	OR	7182	OR	7166	OR	4710	OR	50	7205	OR
180	100	7191	OR	7183	OR	7167	OR	4711	OR	50	7206	OR
220	100	7192	OR	7178	OR	7168	OR	4712	OR	50	7207	OR
240	100	7193	OR	7179	OR	7169	OR	4722	OR	50	7208	OR
280	100	7194	OR			7170	OR					
320	100	7195	OR	7180	OR	7171	OR	4713	ST	50	7209	OR
360	100	7196	OR			7172	OR					
400	100	7197	OR	7181	OR	7173	OR	4714	ST	50	7210	OR
500	100	7198	OR			7174	OR	4715	ST			
600	100	7199	OR			7175	OR	4716	ST			

**NEW :
MULTI-HOLE
ABRASIVES
21 HOLES**

LR880 PRIMIUUM – SELF ADHESIVE (minimum of 12000 discs/grit)

Grit	Selling unit	Diam. 150 mm							
		without holes		6 holes		8 holes		8+1 holes	
		Code	Lead time	Code	Lead time	Code	Lead time	Code	Lead time
180	100	7754	OR	7766	OR	7806	OR	7813	OR
220	100	7755	OR	7805	OR	7807	OR	7814	OR
240	100	7756	OR	7767	OR	7808	OR	7815	OR
320	100	7758	OR	7768	OR	7809	OR	7816	OR
400	100	7760	OR	7769	OR	7810	OR	7817	OR
600	100	7762	OR	7745	OR	7811	OR	7818	OR

ADVANTAGES

- ✓ Especially treated grits for a better **FINISHING WORK.**
- ✓ Double resin coat for **GRIT HOLDING AND BETTER RESISTANCE TO THE HEATING.**
- ✓ An anti-clogging layer for **A BETTER LIFETIME.**